

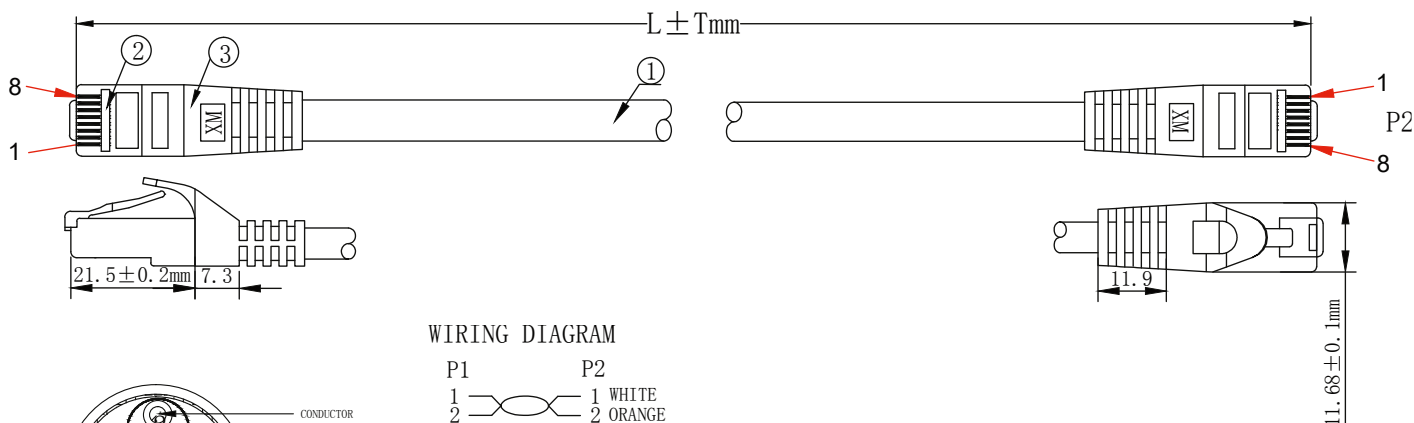


## INLINE® PATCHKABEL, S/FTP (PIMF), CAT.8.1, 2000MHZ, HALOGENFREI, KUPFER, GRAU



### WIRING DIAGRAM



③	OVER MOLD	75A PVC (Color same as cable)	2
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 50U", The Shell plated nickel, Black	2
①	CABLE	S/FTP CAT. 8 (AWG26 BC*1P+AL-FOIL)*4PAIRS+ BRAID+ JACKET:LSZH OD:6.2±0.2mm	1

- Cat.8.1 Netzwerk-Patchkabel, Rundkabel
- Bis 40Gb/s kompatibel
- S/FTP PIMF
- Stecker schwarz
- Kontakte vergoldet 50µ"
- 26AWG
- Leiter: Kupfer
- AL-MG Geflecht
- Pinbelegung nach TIA/EIA568B
- Mantel: LSZH
- ISO/IEC 11801 Klasse I 2000Mhz
- Fluke Channel Test ISO 11801 Kanal Klasse I
- IEC60754-2 IEC61034
- Unterstützt PoE nach IEEE 802.3af, PoE+ nach IEEE 802.3at
- Lebensdauer der Steckerkontakte: 750 Zyklen min.
- Betriebstemperatur: -10 ~+60°C

Art. Nr.	Länge	EAN
78833	0,3 m	4043718294435
78850	0,5 m	4043718287406
78801	1 m	4043718287338
78814	1,5 m	4043718287383
78802	2 m	4043718287345
78803	3 m	4043718287352
78805	5 m	4043718287369
78807	7 m	4043718287376
78800	10 m	4043718287321
78815	15 m	4043718287390